

# Battery Test Report

Report No.: LA2025B1094006

Samples Li-ion Battery

Model LX 701115

Applicant Dongguan LIXING Battery Co., Ltd.

Issue Date 2025-06-18

深圳市莱恩瑞斯科技有限公司

**Shenzhen Lionaces Technology Co., Ltd.**

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Shenzhen Lionaces Technology Co., Ltd.

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lilionaces.com](mailto:service@lilionaces.com)

Tel: (86-755)-28280690

**IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021**

**Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications – Part 2: Lithium systems**

Report Reference No..... : LA2025B1094006

Tested by (+ signature)..... : Li Wen

*Li Wen*

Reviewed by (+ signature) ..... : Allen Zeng

*Allen Zeng*

Approved by (+signature) ..... : Liu haibin

*Liu haibin*

Date of issue..... : 2025-06-18

Contents..... : Total 26 pages.

**Testing laboratory**

Name..... : Shenzhen Lionaces Technology Co., Ltd.

Address..... : 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China

Testing location..... : Same as above.

**Applicant**

Name..... : Dongguan LIXING Battery Co., Ltd.

Address..... : Room 201, Building 2, No. 42 Longyuan road, Yanwu Dalingshan town, Dongguan, Guangdong, P.R.China

**Manufacturer**

Name..... : Dongguan LIXING Battery Co., Ltd.

Address..... : Room 201, Building 2, No. 42 Longyuan road, Yanwu Dalingshan town, Dongguan, Guangdong, P.R.China

**Test specification**

Standard..... : IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021

Test procedure ..... : Type test

Procedure deviation..... : N/A

Non-standard test method..... : N/A

**Test Report Form/blank test report**

Test Report Form No..... : IEC62133\_2C

Test Report Form(s) Originator..... : Lionaces

Master TRF..... : Dated 2022-07

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces. It cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lilionaces.com](mailto:service@lilionaces.com)

Tel: (86-755)-28280690

|                                                                                                                                                      |             |                                                                                                                                       |               |                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------|
| <b>Test item</b>                                                                                                                                     |             |                                                                                                                                       |               |                 |
| Product designation.....                                                                                                                             |             | Li-ion Battery                                                                                                                        |               |                 |
| Brand name.....                                                                                                                                      |             | N/A                                                                                                                                   |               |                 |
| Test model.....                                                                                                                                      |             | LX 701115                                                                                                                             |               |                 |
| Rating(s).....                                                                                                                                       |             | 3.7V, 70mAh, 0.259Wh                                                                                                                  |               |                 |
| <b>Test item particulars</b>                                                                                                                         |             |                                                                                                                                       |               |                 |
| Classification of installation and use.....                                                                                                          |             | N/A                                                                                                                                   |               |                 |
| Supply connection.....                                                                                                                               |             | DC Connector                                                                                                                          |               |                 |
| Recommend charging method declared by the manufacturer.....                                                                                          |             | Charge at constant current 14mA until the voltage reaches 4.2V, then charge at 4.2V till charge current is 0.7mA at ambient 20°C±5°C. |               |                 |
| Discharge current(0.2I <sub>A</sub> ).....                                                                                                           |             | 14mA                                                                                                                                  |               |                 |
| Specified final voltage .....                                                                                                                        |             | 2.75V                                                                                                                                 |               |                 |
| Chemistry .....                                                                                                                                      |             | <input type="checkbox"/> nickel systems <input checked="" type="checkbox"/> lithium systems                                           |               |                 |
| Recommend of charging limit for lithium system                                                                                                       |             |                                                                                                                                       |               |                 |
| Upper limit charging voltage per cell.....                                                                                                           |             | 4.2V                                                                                                                                  |               |                 |
| Maximum charging current.....                                                                                                                        |             | 70mA                                                                                                                                  |               |                 |
| Charging temperature upper limit.....                                                                                                                |             | 45°C                                                                                                                                  |               |                 |
| Charging temperature lower limit.....                                                                                                                |             | 0°C                                                                                                                                   |               |                 |
| Polymer cell electrolyte type.....                                                                                                                   |             | <input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A                   |               |                 |
| <b>Test case verdicts</b>                                                                                                                            |             |                                                                                                                                       |               |                 |
| Test case does not apply to the test object.....                                                                                                     |             | N (/A)                                                                                                                                |               |                 |
| Test item does meet the requirement.....                                                                                                             |             | P (ass)                                                                                                                               |               |                 |
| Test item does not meet the requirement.....                                                                                                         |             | F (ail)                                                                                                                               |               |                 |
| <b>Testing</b>                                                                                                                                       |             |                                                                                                                                       |               |                 |
| Date of receipt of test item .....                                                                                                                   |             | 2025-05-16                                                                                                                            |               |                 |
| Date(s) of performance of test.....                                                                                                                  |             | 2025-05-16 to 2025-05-29                                                                                                              |               |                 |
| <b>Attachment</b>                                                                                                                                    |             |                                                                                                                                       |               |                 |
| Attachment A.....                                                                                                                                    |             | Photos of product                                                                                                                     |               |                 |
| <b>General remarks:</b>                                                                                                                              |             |                                                                                                                                       |               |                 |
| This report shall not be reproduced except in full without the written approval of the testing laboratory.                                           |             |                                                                                                                                       |               |                 |
| The test results presented in this report relate only to the item tested.                                                                            |             |                                                                                                                                       |               |                 |
| “(See remark #)” refers to a remark appended to the report.                                                                                          |             |                                                                                                                                       |               |                 |
| “(See appended table)” refers to a table appended to the report.                                                                                     |             |                                                                                                                                       |               |                 |
| Throughout this report a point is used as the decimal separator.                                                                                     |             |                                                                                                                                       |               |                 |
| <input checked="" type="checkbox"/> The product meets the requirements of IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021. and EN 62133-2:2017/A1:2021. |             |                                                                                                                                       |               |                 |
| <b>When differences exist; they shall be identified in the General product information section.</b>                                                  |             |                                                                                                                                       |               |                 |
| Name and address of factory (ies) .....                                                                                                              |             | Same as Manufacturer.                                                                                                                 |               |                 |
| Report Revise Record:                                                                                                                                |             |                                                                                                                                       |               |                 |
| Report Version                                                                                                                                       | Revise Time | Issued Date                                                                                                                           | Valid Version | Notes           |
| V1.0                                                                                                                                                 | /           | 2025-06-18                                                                                                                            | Valid         | Original report |

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces Technology Co., Ltd. and cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

### General product information

|                                | Cell      | Battery   |
|--------------------------------|-----------|-----------|
| Model                          | LX 701115 | LX 701115 |
| Nominal capacity               | 70mAh     | 70mAh     |
| Nominal voltage                | 3.7V      | 3.7V      |
| Nominal charge current         | 14mA      | 14mA      |
| Nominal discharge current      | 14mA      | 14mA      |
| Maximum charge current         | 70mA      | 70mA      |
| Maximum discharge current      | 70mA      | 70mA      |
| Limited Charging Voltage       | 4.2V      | 4.2V      |
| Upper limited charging voltage | 4.2V      | 4.2V      |
| Cut-off voltage                | 2.75V     | 2.75V     |
| Charging temp. Range           | 0-45℃     | 0-45℃     |

### Copy of marking plate

This is reference label, final label should be including the content of it.

|                                     |              |
|-------------------------------------|--------------|
| (+)Red                              | (-)Black     |
| Li-ion Battery                      | LX 701115    |
| 3.7V, 70mAh, 0.259Wh                | 1ICP7/11/16  |
| Made in China                       | Date: YYMMDD |
| Dongguan LIXING Battery Co., Ltd.   |              |
| Warning: Risk of Fire and Burns.    |              |
| Follow Manufacturer's Instructions. |              |



Remark: "YYMMDD" represents the date of manufacture. "DD" represents the day, "MM" represents the month, "yy" represents the year.

### Caution for ingestion of small cells and batteries

- Keep small cells and batteries which are considered swallowable out of the reach of children.
- Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion.
- In case of ingestion of a cell or battery, seek medical assistance promptly.

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces Technology Co., Ltd. and cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be found on the website, <http://www.lionaces.com>


Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)


E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

### Circuit diagram:

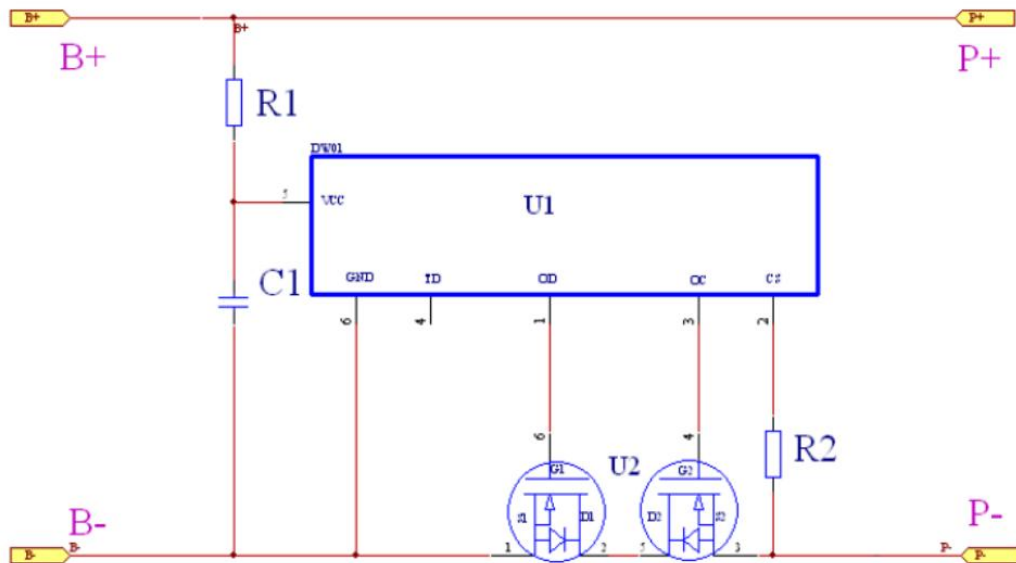

### Construction:

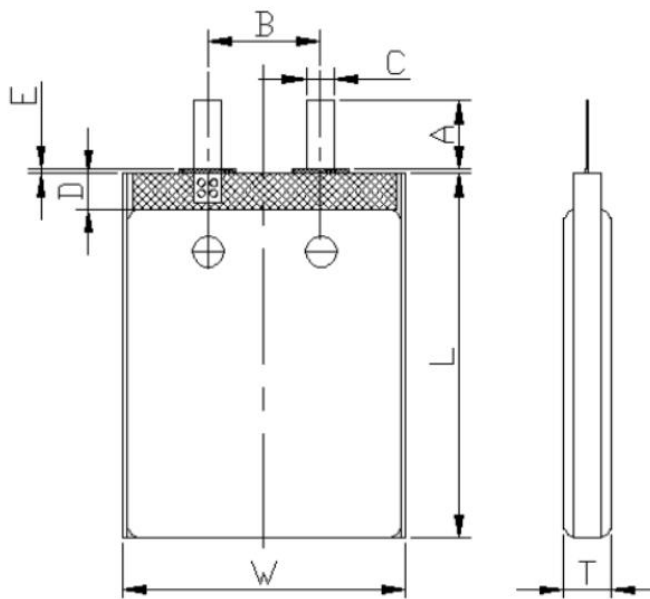

Cell (Max. T×W×L: 7.0×11.0×16.0mm)

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                                                                                                                                                                            |                                                            |         |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|---------|
| Clause                                       | Requirement – Test                                                                                                                                                                                                         | Result – Remark                                            | Verdict |
| <b>4</b>                                     | <b>PARAMETER MEASUREMENT TOLERANCES</b>                                                                                                                                                                                    |                                                            | P       |
|                                              | Parameter measurement tolerances                                                                                                                                                                                           | Comply with relevant requirements.                         | P       |
| <b>5</b>                                     | <b>GENERAL SAFETY CONSIDERATIONS</b>                                                                                                                                                                                       |                                                            | P       |
| <b>5.1</b>                                   | <b>General</b>                                                                                                                                                                                                             |                                                            | P       |
|                                              | Cells and batteries so designed and constructed that they are safe under conditions of both intended use and reasonably foreseeable misuse                                                                                 |                                                            | P       |
| <b>5.2</b>                                   | <b>Insulation and wiring</b>                                                                                                                                                                                               |                                                            | P       |
|                                              | The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ                                                 |                                                            | N/A     |
|                                              | Insulation resistance (MΩ)..... :                                                                                                                                                                                          |                                                            | —       |
|                                              | Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements                                                                                               |                                                            | P       |
|                                              | Orientation of wiring maintains adequate clearance and creepage distances between conductors                                                                                                                               |                                                            | P       |
|                                              | Mechanical integrity of internal connections accommodates reasonably foreseeable misuse                                                                                                                                    |                                                            | P       |
| <b>5.3</b>                                   | <b>Venting</b>                                                                                                                                                                                                             |                                                            | P       |
|                                              | Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition            | Venting mechanism exists on the narrow side of pouch cell. | P       |
|                                              | Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief                                                                      |                                                            | N/A     |
| <b>5.4</b>                                   | <b>Temperature, voltage and current management</b>                                                                                                                                                                         |                                                            | P       |
|                                              | Batteries are designed such that abnormal temperature rise conditions are prevented                                                                                                                                        |                                                            | P       |
|                                              | Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer                                                                                                             |                                                            | P       |
|                                              | Batteries are provided with specifications and charging instructions for equipment manufacturers so that specified chargers are designed to maintain charging within the temperature, voltage and current limits specified |                                                            | P       |
| <b>5.5</b>                                   | <b>Terminal contacts</b>                                                                                                                                                                                                   |                                                            | P       |

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                                                                                                                                                                                            |                              |         |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------|
| Clause                                       | Requirement – Test                                                                                                                                                                                                                         | Result – Remark              | Verdict |
|                                              | The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current                                                                                                                                     | Complied. DC Connector used. | P       |
|                                              | External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance                                                                                                             |                              | P       |
|                                              | Terminal contacts are arranged to minimize the risk of short-circuit                                                                                                                                                                       |                              | P       |
| <b>5.6</b>                                   | <b>Assembly of cells into batteries</b>                                                                                                                                                                                                    |                              | P       |
| 5.6.1                                        | General                                                                                                                                                                                                                                    |                              | P       |
|                                              | Each battery has an independent control and protection for current, voltage, temperature and any other parameter required for safety and to maintain the cells within their operating region                                               |                              | P       |
|                                              | This protection may be provided external to the battery such as within the charger or the end devices                                                                                                                                      |                              | N/A     |
|                                              | If protection is external to the battery, the manufacturer of the battery provide this safety relevant information to the external device manufacturer for implementation                                                                  |                              | N/A     |
|                                              | If there is more than one battery housed in a single battery case, each battery has protective circuitry that can maintain the cells within their operating regions                                                                        |                              | N/A     |
|                                              | Manufacturers of cells specify current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly                                                                                     |                              | P       |
|                                              | Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate circuitry to prevent operation of cells outside the limits specified by the cell manufacturer                             |                              | N/A     |
|                                              | Protective circuit components are added as appropriate and consideration given to the end-device application                                                                                                                               |                              | P       |
|                                              | The manufacturer of the battery provide a safety analysis of the battery safety circuitry with a test report including a fault analysis of the protection circuit under both charging and discharging conditions confirming the compliance |                              | P       |
| 5.6.2                                        | Design recommendation                                                                                                                                                                                                                      |                              | P       |
|                                              | For the battery consisting of a single cell or a single cellblock, it is recommended that the charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Table 2                                    |                              | P       |
|                                              | For the battery consisting of series-connected plural                                                                                                                                                                                      |                              | N/A     |

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                                                                                                                                                                                                                                                                                           |                 |         |
|----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause                                       | Requirement – Test                                                                                                                                                                                                                                                                                                                        | Result – Remark | Verdict |
|                                              | single cells or series-connected plural cellblocks, it is recommended that the voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Table 2, by monitoring the voltage of every single cell or the single cellblocks                                        |                 |         |
|                                              | For the battery consisting of series-connected plural single cells or series-connected plural cellblocks, it is recommended that charging is stopped when the upper limit of the charging voltage is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks |                 | N/A     |
|                                              | For batteries consisting of series-connected cells or cell blocks, nominal charge voltage are not counted as an overcharge protection                                                                                                                                                                                                     |                 | N/A     |
|                                              | For batteries consisting of series-connected cells or cell blocks, cells have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer                                                                                                                                               |                 | N/A     |
|                                              | It is recommended that the cells and cell blocks are not discharged beyond the cell manufacturer's specified final voltage                                                                                                                                                                                                                |                 | P       |
|                                              | For batteries consisting of series-connected cells or cell blocks, cell balancing circuitry are incorporated into the battery management system                                                                                                                                                                                           |                 | N/A     |
| 5.6.3                                        | Mechanical protection for cells and components of batteries                                                                                                                                                                                                                                                                               |                 | N/A     |
|                                              | Mechanical protection for cells, cell connections and control circuits within the battery are provided to prevent damage as a result of intended use and reasonably foreseeable misuse                                                                                                                                                    |                 | N/A     |
|                                              | The mechanical protection can be provided by the battery case or it can be provided by the end product enclosure for those batteries intended for building into an end product                                                                                                                                                            |                 | N/A     |
|                                              | The battery case and compartments housing cells are designed to accommodate cell dimensional tolerances during charging and discharging as recommended by the cell manufacturer                                                                                                                                                           |                 | N/A     |
|                                              | For batteries intended for building into a portable end product, testing with the battery installed within the end product is considered when conducting mechanical tests                                                                                                                                                                 |                 | N/A     |
| 5.7                                          | <b>Quality plan</b>                                                                                                                                                                                                                                                                                                                       |                 | P       |
|                                              | The manufacturer prepares and implements a                                                                                                                                                                                                                                                                                                | Complied.       | P       |

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                                                                                                                                    |                 |         |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause                                       | Requirement – Test                                                                                                                                                                 | Result – Remark | Verdict |
|                                              | quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery |                 |         |
| <b>5.8</b>                                   | <b>Battery safety components</b>                                                                                                                                                   |                 | N/A     |

|          |                                                                                                                                                                                                           |                                          |     |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|-----|
| <b>6</b> | <b>TYPE TEST AND SAMPLE SIZE</b>                                                                                                                                                                          |                                          | P   |
|          | Tests are made with the number of cells or batteries specified in Table 1 using cells or batteries that are not more than six months old                                                                  |                                          | P   |
|          | The internal resistance of coin cells are measured in accordance with Annex D. Coin cells with internal resistance less than or equal to 3 $\Omega$ are tested in accordance with Table 1                 | Prismatic cell                           | N/A |
|          | Unless otherwise specified, tests are carried out in an ambient temperature of 20 °C $\pm$ 5 °C                                                                                                           | Tests are carried out at 20°C $\pm$ 5°C. | P   |
|          | The safety analysis of 5.6.1 identify those components of the protection circuit that are critical for short-circuit, overcharge and overdischarge protection                                             |                                          | P   |
|          | When conducting the short-circuit test, consideration is given to the simulation of any single fault condition that is likely to occur in the protecting circuit that would affect the short-circuit test |                                          | P   |

|            |                                                                                                                                                                                                |             |   |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---|
| <b>7</b>   | <b>Specific requirements and tests</b>                                                                                                                                                         |             | P |
| <b>7.1</b> | <b>Charging procedure for test purposes</b>                                                                                                                                                    |             | P |
| 7.1.1      | First procedure                                                                                                                                                                                |             | P |
|            | This charging procedure applies to subclauses other than those specified in 7.1.2                                                                                                              |             | P |
|            | Unless otherwise stated in this document, the charging procedure for test purposes is carried out in an ambient temperature of 20 °C $\pm$ 5 °C, using the method declared by the manufacturer | See page 3. | P |
|            | Prior to charging, the battery has been discharged at 20 °C $\pm$ 5 °C at a constant current of 0,2 It A down to a specified final voltage                                                     | See page 3. | P |
| 7.1.2      | Second procedure                                                                                                                                                                               |             | P |
|            | This charging procedure applies only to 7.3.1, 7.3.4, 7.3.5, and 7.3.9                                                                                                                         |             | P |
|            | After stabilization for 1 h to 4 h, at an ambient temperature of the highest test temperature and the                                                                                          |             | P |

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                                                                                                                                                                                                                            |                                                                                           |         |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------|
| Clause                                       | Requirement – Test                                                                                                                                                                                                                                                         | Result – Remark                                                                           | Verdict |
|                                              | lowest test temperature, respectively, as specified in Table 2, cells are charged by using the upper limit charging voltage and maximum charging current, until the charging current is reduced to 0,05 It A, using a constant current to constant voltage charging method |                                                                                           |         |
| <b>7.2</b>                                   | <b>Intended use</b>                                                                                                                                                                                                                                                        |                                                                                           | P       |
| 7.2.1                                        | Continuous charging at constant voltage (cells)                                                                                                                                                                                                                            | Tested complied.                                                                          | P       |
|                                              | Fully charged cells are subjected for 7 days to a charge using the charging method for current and standard voltage specified by the cell manufacturer                                                                                                                     |                                                                                           | P       |
|                                              | Results: no fire, no explosion, no leakage..... :                                                                                                                                                                                                                          | (See appended table 7.2.1)                                                                | P       |
| 7.2.2                                        | Case stress at high ambient temperature (battery)                                                                                                                                                                                                                          | Tested complied.                                                                          | P       |
|                                              | Oven temperature (°C)..... :                                                                                                                                                                                                                                               | 70                                                                                        | —       |
|                                              | Results: no physical distortion of the battery case resulting in exposure of internal protective components and cells                                                                                                                                                      | No physical distortion of the battery casing resulting in exposure if internal components | P       |
| <b>7.3</b>                                   | <b>Reasonably foreseeable misuse</b>                                                                                                                                                                                                                                       |                                                                                           | P       |
| 7.3.1                                        | External short-circuit (cell)                                                                                                                                                                                                                                              | Tested complied.                                                                          | P       |
|                                              | The cells were tested until one of the following occurred:                                                                                                                                                                                                                 |                                                                                           | P       |
|                                              | - 24 hours elapsed; or                                                                                                                                                                                                                                                     |                                                                                           | N/A     |
|                                              | - The case temperature declined by 20 % of the maximum temperature rise                                                                                                                                                                                                    |                                                                                           | P       |
|                                              | Results: no fire, no explosion..... :                                                                                                                                                                                                                                      | (See appended table 7.3.1)                                                                | P       |
| 7.3.2                                        | External short-circuit (battery)                                                                                                                                                                                                                                           | Tested complied.                                                                          | P       |
|                                              | The batteries were tested until one of the following occurred:                                                                                                                                                                                                             |                                                                                           | P       |
|                                              | - 24 hours elapsed; or                                                                                                                                                                                                                                                     |                                                                                           | P       |
|                                              | - The case temperature declined by 20 % of the maximum temperature rise                                                                                                                                                                                                    |                                                                                           | P       |
|                                              | In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition                                                                                                 |                                                                                           | N/A     |
|                                              | A single fault in the discharge protection circuit is conducted on one to four (depending upon the protection circuit) of the five samples before conducting the short-circuit test                                                                                        |                                                                                           | P       |
|                                              | A single fault applies to protective component parts such as MOSFET (metal oxide semiconductor field-effect transistor), fuse, thermostat or positive                                                                                                                      | Single fault applies on MOSFET (U2)                                                       | P       |

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                                                                                       |                            |         |
|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------|
| Clause                                       | Requirement – Test                                                                                                                    | Result – Remark            | Verdict |
|                                              | temperature coefficient (PTC) thermistor                                                                                              |                            |         |
|                                              | Results: no fire. no explosion.....:                                                                                                  | (See appended table 7.3.2) | P       |
| 7.3.3                                        | Free fall                                                                                                                             | Tested complied.           | P       |
|                                              | Results: no fire, no explosion                                                                                                        | No fire. No explosion      | P       |
| 7.3.4                                        | Thermal abuse (cells)                                                                                                                 | Tested complied.           | P       |
|                                              | Oven temperature (°C).....:                                                                                                           | 130°C                      | —       |
|                                              | Results: no fire, no explosion                                                                                                        | No fire. No explosion      | P       |
| 7.3.5                                        | Crush (cells)                                                                                                                         | Tested complied.           | P       |
|                                              | The crushing force was released upon:                                                                                                 |                            | P       |
|                                              | - The maximum force of 13 kN ± 0,78 kN has been applied; or                                                                           |                            | P       |
|                                              | - An abrupt voltage drop of one-third of the original voltage has been obtained                                                       |                            | N/A     |
|                                              | Results: no fire, no explosion.....:                                                                                                  | (See appended table 7.3.5) | P       |
| 7.3.6                                        | Over-charging of battery                                                                                                              | Tested complied.           | P       |
|                                              | The supply voltage which is:                                                                                                          |                            | P       |
|                                              | - 1,4 times the upper limit charging voltage presented in Table A.1 (but not to exceed 6,0 V) for single cell/cell block batteries or |                            | P       |
|                                              | - 1,2 times the upper limit charging voltage resented in Table A.1 per cell for series connected multi-cell batteries, and            |                            | N/A     |
|                                              | - Sufficient to maintain a current of 2,0 It A throughout the duration of the test or until the supply voltage is reached             |                            | P       |
|                                              | Test was continued until the temperature of the outer casing:                                                                         |                            | P       |
|                                              | - Reached steady state conditions (less than 10 °C change in 30-minute period); or                                                    |                            | P       |
|                                              | - Returned to ambient                                                                                                                 |                            | N/A     |
|                                              | Results: No fire. No explosion..... :                                                                                                 | (See appended table 7.3.6) | P       |
| 7.3.7                                        | Forced discharge (cells)                                                                                                              | Tested complied.           | P       |
|                                              | Discharge a single cell to the lower limit discharge voltage specified by the cell manufacturer                                       |                            | P       |
|                                              | The discharged cell is then subjected to a forced discharge at 1 It A to the negative value of the upper limit charging voltage       |                            | P       |
|                                              | - The discharge voltage reaches the negative value of upper limit charging voltage within the testing                                 |                            | N/A     |

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                                                                                                                                  |                                                   |         |
|----------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------|
| Clause                                       | Requirement – Test                                                                                                                                                               | Result – Remark                                   | Verdict |
|                                              | duration. The voltage is maintained at the negative value of the upper limit charging voltage by reducing the current for the remainder of the testing duration                  |                                                   |         |
|                                              | - The discharge voltage does not reach the negative value of upper limit charging voltage within the testing duration. The test is terminated at the end of the testing duration |                                                   | P       |
|                                              | Results: no fire, no explosion.....:                                                                                                                                             | (See appended table 7.3.7)                        | P       |
| 7.3.8                                        | Mechanical tests (batteries)                                                                                                                                                     |                                                   | P       |
| 7.3.8.1                                      | Vibration                                                                                                                                                                        |                                                   | P       |
|                                              | Results: no fire, no explosion, no rupture, no leakage or venting.....:                                                                                                          | (See appended table 7.3.8.1)                      | P       |
| 7.3.8.2                                      | Mechanical shock                                                                                                                                                                 |                                                   | P       |
|                                              | Results: no leakage, no venting, no rupture, no explosion and no fire.....:                                                                                                      | (See appended table 7.3.8.2)                      | P       |
| 7.3.9                                        | Design evaluation – Forced internal short-circuit (cells)                                                                                                                        | Tested complied.                                  | P       |
|                                              | The cells complied with national requirement for.....:                                                                                                                           | France, Japan, Republic of Korea and Switzerland. | —       |
|                                              | The pressing was stopped upon:                                                                                                                                                   |                                                   | P       |
|                                              | - A voltage drop of 50 mV has been detected; or                                                                                                                                  |                                                   | N/A     |
|                                              | - The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached                                                                                    | 400N                                              | P       |
|                                              | Results: no fire.....:                                                                                                                                                           | (See appended table 7.3.9)                        | P       |

|            |                                                                                                                                                           |                                                                    |     |
|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|-----|
| <b>8</b>   | <b>INFORMATION FOR SAFETY</b>                                                                                                                             |                                                                    | P   |
| <b>8.1</b> | <b>General</b>                                                                                                                                            |                                                                    | P   |
|            | Manufacturers of secondary cells provides information about current, voltage and temperature limits of their products                                     | Information for safety mentioned in manufacturer's specifications. | P   |
|            | Manufacturers of batteries provides information regarding how to minimize and mitigate hazards to equipment manufacturers or end-users                    |                                                                    | P   |
|            | Systems analyses are performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product |                                                                    | N/A |
|            | As appropriate, any information relating to hazard avoidance resulting from a system analysis is provided to the end user                                 |                                                                    | N/A |
| <b>8.2</b> | <b>Small cell and battery safety information</b>                                                                                                          | Small cell and battery.                                            | P   |

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                                                                                            |                 |         |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|-----------------|---------|
| Clause                                       | Requirement – Test                                                                                                                         | Result – Remark | Verdict |
|                                              | The following warning language is to be provided with the information packaged with the small cells and batteries or equipment using them: |                 | P       |
|                                              | - Keep small cells and batteries which are considered swallowable out of the reach of children                                             |                 | P       |
|                                              | - Swallowing may lead to burns, perforation of soft tissue, and death. Severe burns can occur within 2 h of ingestion                      |                 | P       |
|                                              | - In case of ingestion of a cell or battery, seek medical assistance promptly                                                              |                 | P       |

|            |                                                                                                                                                                     |                               |     |
|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-----|
| <b>9</b>   | <b>MARKING</b>                                                                                                                                                      |                               | P   |
| <b>9.1</b> | <b>Cell marking</b>                                                                                                                                                 | The final product is battery. | N/A |
|            | Cells are marked as specified in IEC 61960, except coin cells                                                                                                       |                               | N/A |
|            | Coin cells whose external surface area is too small to accommodate the markings on the cells show the designation and polarity                                      |                               | N/A |
|            | By agreement between the cell manufacturer and the battery and/or end product manufacturer, component cells used in the manufacture of a battery need not be marked |                               | N/A |
| <b>9.2</b> | <b>Battery marking</b>                                                                                                                                              | See marking plate on page 4.  | P   |
|            | Batteries are marked as specified in IEC 61960, except for coin batteries                                                                                           |                               | P   |
|            | Coin batteries whose external surface area is too small to accommodate the markings on the batteries show the designation and polarity                              |                               | N/A |
|            | Batteries are marked with an appropriate caution statement                                                                                                          |                               | P   |
|            | - Terminals have clear polarity marking on the external surface of the battery, or                                                                                  |                               | P   |
|            | - Not be marked with polarity markings if the design of the external connector prevents reverse polarity connections                                                |                               | N/A |
| <b>9.3</b> | <b>Caution for ingestion of small cells and batteries</b>                                                                                                           | Small cell and battery.       | P   |
|            | Coin cells and batteries identified as small batteries include a caution statement regarding the hazards of ingestion in accordance with 8.2                        |                               | N/A |
|            | Small cells and batteries are intended for direct sale in consumer-replaceable applications, caution for ingestion is given on the immediate package                |                               | P   |

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                       |                                                                                               |         |
|----------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|---------|
| Clause                                       | Requirement – Test                                                    | Result – Remark                                                                               | Verdict |
| <b>9.4</b>                                   | <b>Other information</b>                                              |                                                                                               | P       |
|                                              | The following information are marked on or supplied with the battery: |                                                                                               | P       |
|                                              | - Storage and disposal instructions                                   | Information for disposal instructions mentioned in manufacturer's specifications.             | P       |
|                                              | - Recommended charging instructions                                   | Information for recommended charging instructions mentioned in manufacturer's specifications. | P       |

|           |                                                                                                              |  |     |
|-----------|--------------------------------------------------------------------------------------------------------------|--|-----|
| <b>10</b> | <b>PACKAGING AND TRANSPORT</b>                                                                               |  | N/A |
|           | Packaging for coin cells are not be small enough to fit within the limits of the ingestion gauge of Figure 3 |  | N/A |

|                |                                                                                   |                                                     |     |
|----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------|-----|
| <b>ANNEX A</b> | <b>CHARGING AND DISCHARGING RANGE OF SECONDARY LITHIUM ION CELLS FOR SAFE USE</b> |                                                     | P   |
| <b>A.1</b>     | <b>General</b>                                                                    |                                                     | P   |
| <b>A.2</b>     | <b>Safety of lithium ion secondary battery</b>                                    | Complied.                                           | P   |
| <b>A.3</b>     | <b>Consideration on charging voltage</b>                                          | Complied.                                           | P   |
| A.3.1          | General                                                                           | Charging voltage is 4.2V                            | P   |
| A.3.2          | Upper limit charging voltage                                                      | 4.2V                                                | P   |
| A.3.2.1        | General                                                                           |                                                     | P   |
| A.3.2.2        | Explanation of safety viewpoint                                                   |                                                     | N/A |
| A.3.2.3        | Safety requirements, when different upper limit charging voltage is applied       | 4.2V applied.                                       | N/A |
| <b>A.4</b>     | <b>Consideration of temperature and charging current</b>                          |                                                     | P   |
| A.4.1          | General                                                                           |                                                     | P   |
| A.4.2          | Recommended temperature range                                                     | Charging temperature declared by client is: 0-45°C. | N/A |
| A.4.2.1        | General                                                                           |                                                     | N/A |
| A.4.2.2        | Safety consideration when a different recommended temperature range is applied    |                                                     | N/A |
| A.4.3          | High temperature range                                                            |                                                     | N/A |
| A.4.3.1        | General                                                                           |                                                     | P   |
| A.4.3.2        | Explanation of safety viewpoint                                                   |                                                     | P   |
| A.4.3.3        | Safety considerations when specifying charging                                    |                                                     | P   |

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                                               |                 |         |
|----------------------------------------------|-----------------------------------------------------------------------------------------------|-----------------|---------|
| Clause                                       | Requirement – Test                                                                            | Result – Remark | Verdict |
|                                              | conditions in the high temperature range                                                      |                 |         |
| A.4.3.4                                      | Safety considerations when specifying a new upper limit in the high temperature range         |                 | P       |
| A.4.4                                        | Low temperature range                                                                         |                 | P       |
| A.4.4.1                                      | General                                                                                       |                 | P       |
| A.4.4.2                                      | Explanation of safety viewpoint                                                               |                 | P       |
| A.4.4.3                                      | Safety considerations, when specifying charging conditions in the low temperature range       |                 | P       |
| A.4.4.4                                      | Safety considerations when specifying a new lower limit in the low temperature range          |                 | P       |
| A.4.5                                        | Scope of the application of charging current                                                  |                 | P       |
| A.4.6                                        | Consideration of discharge                                                                    |                 | P       |
| A.4.6.1                                      | General                                                                                       |                 | P       |
| A.4.6.2                                      | Final discharge voltage and explanation of safety viewpoint                                   |                 | P       |
| A.4.6.3                                      | Discharge current and temperature range                                                       |                 | P       |
| A.4.6.4                                      | Scope of application of the discharging current                                               |                 | P       |
| <b>A.5</b>                                   | <b>Sample preparation</b>                                                                     |                 | P       |
| A.5.1                                        | General                                                                                       |                 | P       |
| A.5.2                                        | Insertion procedure for nickel particle to generate internal short                            |                 | P       |
| A.5.3                                        | Disassembly of charged cell                                                                   |                 | P       |
| A.5.4                                        | Shape of nickel particle                                                                      |                 | P       |
| A.5.5                                        | Insertion of nickel particle in cylindrical cell                                              |                 | N/A     |
| A.5.5.1                                      | Insertion of nickel particle in winding core                                                  |                 | N/A     |
| A.5.5.2                                      | Marking the position of the nickel particle on both ends of the winding core of the separator |                 | N/A     |
| A.5.6                                        | Insertion of nickel particle in prismatic cell                                                |                 | P       |
| <b>A.6</b>                                   | <b>Experimental procedure of the forced internal short-circuit test</b>                       |                 | P       |
| A.6.1                                        | Material and tools for preparation of nickel particle                                         |                 | P       |
| A.6.2                                        | Example of a nickel particle preparation procedure                                            |                 | P       |
| A.6.3                                        | Positioning (or placement) of a nickel particle                                               |                 | P       |
| A.6.4                                        | Damaged separator precaution                                                                  |                 | P       |
| A.6.5                                        | Caution for rewinding separator and electrode                                                 |                 | P       |
| A.6.6                                        | Insulation film for preventing short-circuit                                                  |                 | P       |

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces. It cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 |                                                                       |                 |         |
|----------------------------------------------|-----------------------------------------------------------------------|-----------------|---------|
| Clause                                       | Requirement – Test                                                    | Result – Remark | Verdict |
| A.6.7                                        | Caution when disassembling a cell                                     |                 | P       |
| A.6.8                                        | Protective equipment for safety                                       |                 | P       |
| A.6.9                                        | Caution in the case of fire during disassembling                      |                 | P       |
| A.6.10                                       | Caution for the disassembling process and pressing the electrode core |                 | P       |
| A.6.11                                       | Recommended specifications for the pressing device                    |                 | P       |

|                |                                                                          |     |
|----------------|--------------------------------------------------------------------------|-----|
| <b>ANNEX B</b> | <b>RECOMMENDATIONS TO EQUIPMENT MANUFACTURERS AND BATTERY ASSEMBLERS</b> | N/A |
|----------------|--------------------------------------------------------------------------|-----|

|                |                                         |     |
|----------------|-----------------------------------------|-----|
| <b>ANNEX C</b> | <b>RECOMMENDATIONS TO THE END-USERS</b> | N/A |
|----------------|-----------------------------------------|-----|

|                |                                                                                                                                        |                                 |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| <b>ANNEX D</b> | <b>MEASUREMENT OF THE INTERNAL AC RESISTANCE FOR COIN CELLS</b>                                                                        | N/A                             |
| <b>D.1</b>     | <b>General</b>                                                                                                                         | N/A                             |
| <b>D.2</b>     | <b>Method</b>                                                                                                                          | N/A                             |
|                | A sample size of three coin cells is required for this measurement                                                                     | N/A                             |
|                | Coin cells with an internal resistance greater than 3 $\Omega$ require no further testing.....                                         | (See appended table D.2)<br>N/A |
|                | Coin cells with an internal resistance less than or equal to 3 $\Omega$ are subjected to the testing according to Clause 6 and Table 1 | N/A                             |

|                |                                |     |
|----------------|--------------------------------|-----|
| <b>ANNEX E</b> | <b>PACKAGING AND TRANSPORT</b> | N/A |
|----------------|--------------------------------|-----|

|                |                                       |     |
|----------------|---------------------------------------|-----|
| <b>ANNEX F</b> | <b>COMPONENT STANDARDS REFERENCES</b> | N/A |
|----------------|---------------------------------------|-----|

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

| Table: Critical components information                                                                                                        |                                               |            |                                                                                                           |                                              | P                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------|--------------------------|
| Object/part no.                                                                                                                               | Manufacturer/ trademark                       | Type/model | Technical data                                                                                            | Standard 2)                                  | Mark(s) of Conformity 1) |
| PCB                                                                                                                                           | Shenzhen Rong Chuang Yi Technology Co., Ltd.  | 8437       | 130°C                                                                                                     | IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 | Tested with appliance    |
| IC (U1)                                                                                                                                       | Vimicro Electronics Co.,Ltd                   | VADW01     | Overcharge detection voltage: 4.28V±0.025V, Overdischarge detection voltage: 2.4V±0.1V, Topr: -40 to 85°C | IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 | Tested with appliance    |
| MOS (U2)                                                                                                                                      | Shenzhen Full Electronic Group Co., Ltd       | 8205S      | VDs:20V, VGs:±8V, ID:4A, TJ:-55~+150°C                                                                    | IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 | Tested with appliance    |
| Wire                                                                                                                                          | Dongguan Sanxin Electronics Co.,Ltd           | 1571       | 28AWG, 30Vac, 80°C                                                                                        | IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 | Tested with appliance    |
| Cell                                                                                                                                          | Dongguan LIXING Battery Co., Ltd.             | LX 701115  | 3.7V, 70mAh, 0.259Wh                                                                                      | IEC 62133-2:2017, IEC 62133-2:2017/AMD1:2021 | Tested with appliance    |
| - Electrolyte                                                                                                                                 | Dongguan Shanshan Battery Material Co. Lt     | LD-124B    | LiPF <sub>6</sub> +EC+DMC+E MC                                                                            | --                                           | --                       |
| - Separator                                                                                                                                   | XinMingZhi city science and Technology Co Ltd | PE-12      | PE, Thickness: 12μm Shutdown Temperature: 130°C                                                           | --                                           | --                       |
| -Negative electrode                                                                                                                           | BTR New Energy Materials Inc.                 | S360-LN    | Graphite, CMC, SBR, Conductive, Additive, Copper Foil                                                     | --                                           | --                       |
| -Positive electrode                                                                                                                           | Hunan MT New Materials Technology Co.,LTD     | MT320      | LiCoO <sub>2</sub> , PVDF, Conductive Additive, Aluminum Foil                                             | --                                           | --                       |
| Supplementary information:<br>1) Provided evidence ensures the agreed level of compliance. See OD-2039.<br>2) License available upon request. |                                               |            |                                                                                                           |                                              |                          |

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

| 7.2.1                                                                       | Table: Continuous charging at constant voltage (cells) |                                                   |                       |         | P |
|-----------------------------------------------------------------------------|--------------------------------------------------------|---------------------------------------------------|-----------------------|---------|---|
| Sample no.                                                                  | Recommended charging voltage Vc (Vdc)                  | Recommended charging current I <sub>rec</sub> (A) | OCV before test (Vdc) | Results |   |
| C001                                                                        | 4.2                                                    | 0.014                                             | 4.182                 | P       |   |
| C002                                                                        | 4.2                                                    | 0.014                                             | 4.179                 | P       |   |
| C003                                                                        | 4.2                                                    | 0.014                                             | 4.178                 | P       |   |
| C004                                                                        | 4.2                                                    | 0.014                                             | 4.180                 | P       |   |
| C005                                                                        | 4.2                                                    | 0.014                                             | 4.182                 | P       |   |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- No leakage |                                                        |                                                   |                       |         |   |

| 7.3.1                                                            | Table: External short-circuit (cell) |                       |                            |                                       | P       |
|------------------------------------------------------------------|--------------------------------------|-----------------------|----------------------------|---------------------------------------|---------|
| Sample no.                                                       | Ambient T (°C)                       | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise ΔT (°C) | Results |
| <b>Samples charged at charging temperature upper limit: 45°C</b> |                                      |                       |                            |                                       |         |
| C006                                                             | 55.4                                 | 4.184                 | 83.9                       | 115.4                                 | P       |
| C007                                                             | 55.4                                 | 4.181                 | 84.1                       | 112.2                                 | P       |
| C008                                                             | 55.4                                 | 4.183                 | 85.5                       | 117.8                                 | P       |
| C009                                                             | 55.4                                 | 4.184                 | 83.7                       | 116.9                                 | P       |
| C010                                                             | 55.4                                 | 4.184                 | 85.6                       | 113.6                                 | P       |
| <b>Samples charged at charging temperature lower limit: 0°C</b>  |                                      |                       |                            |                                       |         |
| C011                                                             | 55.3                                 | 4.144                 | 82.4                       | 111.3                                 | P       |
| C012                                                             | 55.3                                 | 4.148                 | 83.8                       | 113.6                                 | P       |
| C013                                                             | 55.3                                 | 4.143                 | 80.6                       | 110.5                                 | P       |
| C014                                                             | 55.3                                 | 4.142                 | 82.1                       | 115.2                                 | P       |
| C015                                                             | 55.3                                 | 4.142                 | 81.2                       | 112.5                                 | P       |
| <b>Supplementary information:</b><br>- No fire or explosion      |                                      |                       |                            |                                       |         |

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces Technology Co., Ltd. and cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website: <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| 7.3.2 Table: External short-circuit (battery)        |                |                       |                            |                                               |                                  | P       |
|------------------------------------------------------|----------------|-----------------------|----------------------------|-----------------------------------------------|----------------------------------|---------|
| Sample no.                                           | Ambient T (°C) | OCV before test (Vdc) | Resistance of circuit (mΩ) | Maximum case temperature rise $\Delta T$ (°C) | Component single fault condition | Results |
| B001                                                 | 22.4           | 4.185                 | 81.9                       | 116.7                                         | MOS U2 S-C                       | P       |
| B002                                                 | 22.4           | 4.178                 | 86.1                       | 112.6                                         | MOS U2 S-C                       | P       |
| B003                                                 | 22.4           | 4.182                 | 83.5                       | 114.4                                         | MOS U2 S-C                       | P       |
| B004                                                 | 22.4           | 4.184                 | 85.4                       | 117.6                                         | MOS U2 S-C                       | P       |
| B005                                                 | 22.4           | 4.184                 | 83.6                       | 22.6                                          | --                               | P       |
| Supplementary information:<br>- No fire or explosion |                |                       |                            |                                               |                                  |         |

| 7.3.5                                                     | Table: Crush (cells)  |                                        |                                                     |         | P |
|-----------------------------------------------------------|-----------------------|----------------------------------------|-----------------------------------------------------|---------|---|
| Sample no.                                                | OCV before test (Vdc) | OCV at removal of crushing force (Vdc) | Maximum force applied to the cell during crush (kN) | Results |   |
| Samples charged at charging temperature upper limit: 45°C |                       |                                        |                                                     |         |   |
| C016                                                      | 4.186                 | 4.182                                  | 13                                                  | P       |   |
| C017                                                      | 4.184                 | 4.180                                  | 13                                                  | P       |   |
| C018                                                      | 4.183                 | 4.179                                  | 13                                                  | P       |   |
| C019                                                      | 4.184                 | 4.180                                  | 13                                                  | P       |   |
| C020                                                      | 4.181                 | 4.177                                  | 13                                                  | P       |   |
| Samples charged at charging temperature lower limit: 0°C  |                       |                                        |                                                     |         |   |
| C021                                                      | 4.144                 | 4.139                                  | 13                                                  | P       |   |
| C022                                                      | 4.146                 | 4.141                                  | 13                                                  | P       |   |
| C023                                                      | 4.149                 | 4.144                                  | 13                                                  | P       |   |
| C024                                                      | 4.145                 | 4.141                                  | 13                                                  | P       |   |
| C025                                                      | 4.143                 | 4.138                                  | 13                                                  | P       |   |
| Supplementary information:                                |                       |                                        |                                                     |         |   |
| - No fire or explosion                                    |                       |                                        |                                                     |         |   |

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| 7.3.6                               | Table: Over-charging of battery |                              |                                                     |         | P |
|-------------------------------------|---------------------------------|------------------------------|-----------------------------------------------------|---------|---|
| Constant charging current (A).....: |                                 | 0.14                         |                                                     |         | — |
| Supply voltage (Vdc).....:          |                                 | 5.88                         |                                                     |         | — |
| Sample no.                          | OCV before charging (Vdc)       | Total charging time (minute) | Maximum outer case temperature rise $\Delta T$ (°C) | Results |   |
| B006                                | 3.244                           | 86                           | 24.7                                                | P       |   |
| B007                                | 3.238                           | 86                           | 24.6                                                | P       |   |
| B008                                | 3.237                           | 86                           | 24.7                                                | P       |   |
| B009                                | 3.343                           | 86                           | 24.4                                                | P       |   |
| B010                                | 3.239                           | 86                           | 24.5                                                | P       |   |
| Supplementary information:          |                                 |                              |                                                     |         |   |
| - No fire or explosion              |                                 |                              |                                                     |         |   |

| 7.3.7                      | Table: Forced discharge (cells)                |                                            |                                     |         | P |
|----------------------------|------------------------------------------------|--------------------------------------------|-------------------------------------|---------|---|
| Sample no.                 | OCV before application of reverse charge (Vdc) | Measured reverse charge I <sub>t</sub> (A) | Lower limit discharge voltage (Vdc) | Results |   |
| C026                       | 3.342                                          | 0.07                                       | 2.75                                | P       |   |
| C027                       | 3.338                                          | 0.07                                       | 2.75                                | P       |   |
| C028                       | 3.340                                          | 0.07                                       | 2.75                                | P       |   |
| C029                       | 3.339                                          | 0.07                                       | 2.75                                | P       |   |
| C030                       | 3.341                                          | 0.07                                       | 2.75                                | P       |   |
| Supplementary information: |                                                |                                            |                                     |         |   |
| - No fire or explosion     |                                                |                                            |                                     |         |   |

| 7.3.8.1                                                                                                     | Table: Vibration      |                      |                      |                     |         | P |
|-------------------------------------------------------------------------------------------------------------|-----------------------|----------------------|----------------------|---------------------|---------|---|
| Sample no.                                                                                                  | OCV before test (Vdc) | OCV after test (Vdc) | Mass before test (g) | Mass after test (g) | Results |   |
| B011                                                                                                        | 4.178                 | 4.172                | 1.947                | 1.939               | P       |   |
| B012                                                                                                        | 4.181                 | 4.175                | 1.954                | 1.946               | P       |   |
| B013                                                                                                        | 4.180                 | 4.174                | 1.976                | 1.968               | P       |   |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- No rupture<br>- No leakage<br>- No venting |                       |                      |                      |                     |         |   |

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690

| 7.3.8.2 Table: Mechanical shock                                                                             |                       |                      |                      |                     | P       |
|-------------------------------------------------------------------------------------------------------------|-----------------------|----------------------|----------------------|---------------------|---------|
| Sample no.                                                                                                  | OCV before test (Vdc) | OCV after test (Vdc) | Mass before test (g) | Mass after test (g) | Results |
| B014                                                                                                        | 4.179                 | 4.177                | 1.956                | 1.951               | P       |
| B015                                                                                                        | 4.184                 | 4.182                | 1.978                | 1.973               | P       |
| B016                                                                                                        | 4.181                 | 4.179                | 1.958                | 1.953               | P       |
| <b>Supplementary information:</b><br>- No fire or explosion<br>- No rupture<br>- No leakage<br>- No venting |                       |                      |                      |                     |         |

| 7.3.9 Table: Forced internal short circuit (cells)                                                                                                                                                                                                                                                                                                            |                        |                       |                                 |                              | P       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-----------------------|---------------------------------|------------------------------|---------|
| Sample no.                                                                                                                                                                                                                                                                                                                                                    | Chamber ambient T (°C) | OCV before test (Vdc) | Particle location <sup>1)</sup> | Maximum applied pressure (N) | Results |
| <b>Samples charged at charging temperature upper limit: 45°C</b>                                                                                                                                                                                                                                                                                              |                        |                       |                                 |                              |         |
| C031                                                                                                                                                                                                                                                                                                                                                          | 45                     | 4.184                 | 1                               | 400                          | P       |
| C032                                                                                                                                                                                                                                                                                                                                                          | 45                     | 4.179                 | 1                               | 400                          | P       |
| C033                                                                                                                                                                                                                                                                                                                                                          | 45                     | 4.181                 | 1                               | 400                          | P       |
| C034                                                                                                                                                                                                                                                                                                                                                          | 45                     | 4.178                 | 1                               | 400                          | P       |
| C035                                                                                                                                                                                                                                                                                                                                                          | 45                     | 4.182                 | 1                               | 400                          | P       |
| <b>Samples charged at charging temperature lower limit: 0°C</b>                                                                                                                                                                                                                                                                                               |                        |                       |                                 |                              |         |
| C036                                                                                                                                                                                                                                                                                                                                                          | 0                      | 4.147                 | 1                               | 400                          | P       |
| C037                                                                                                                                                                                                                                                                                                                                                          | 0                      | 4.148                 | 1                               | 400                          | P       |
| C038                                                                                                                                                                                                                                                                                                                                                          | 0                      | 4.145                 | 1                               | 400                          | P       |
| C039                                                                                                                                                                                                                                                                                                                                                          | 0                      | 4.143                 | 1                               | 400                          | P       |
| C040                                                                                                                                                                                                                                                                                                                                                          | 0                      | 4.146                 | 1                               | 400                          | P       |
| <b>Supplementary information:</b><br><sup>1)</sup> Identify one of the following:<br>1: Nickel particle inserted between positive and negative (active material) coated area.<br>2: Nickel particle inserted between positive aluminium foil and negative active material coated area.<br>- No fire<br>Remark: There is no particle location 2 for this cell. |                        |                       |                                 |                              |         |

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces Technology Co., Ltd. and cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website: <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.


Website: [www.lionaces.com](http://www.lionaces.com) E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690


| D.2 Table: Internal AC resistance for coin cells                                                                                                           |                |                |                    | N/A                   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------|--------------------|-----------------------|
| Sample no.                                                                                                                                                 | Ambient T (°C) | Store time (h) | Resistance Rac (Ω) | Results <sup>1)</sup> |
|                                                                                                                                                            |                |                |                    |                       |
|                                                                                                                                                            |                |                |                    |                       |
|                                                                                                                                                            |                |                |                    |                       |
| <b>Supplementary information:</b><br><sup>1)</sup> Coin cells with internal resistance less than or equal to 3 Ω, see test result on corresponding tables. |                |                |                    |                       |

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

**Attachment A**  
**Photos of product**

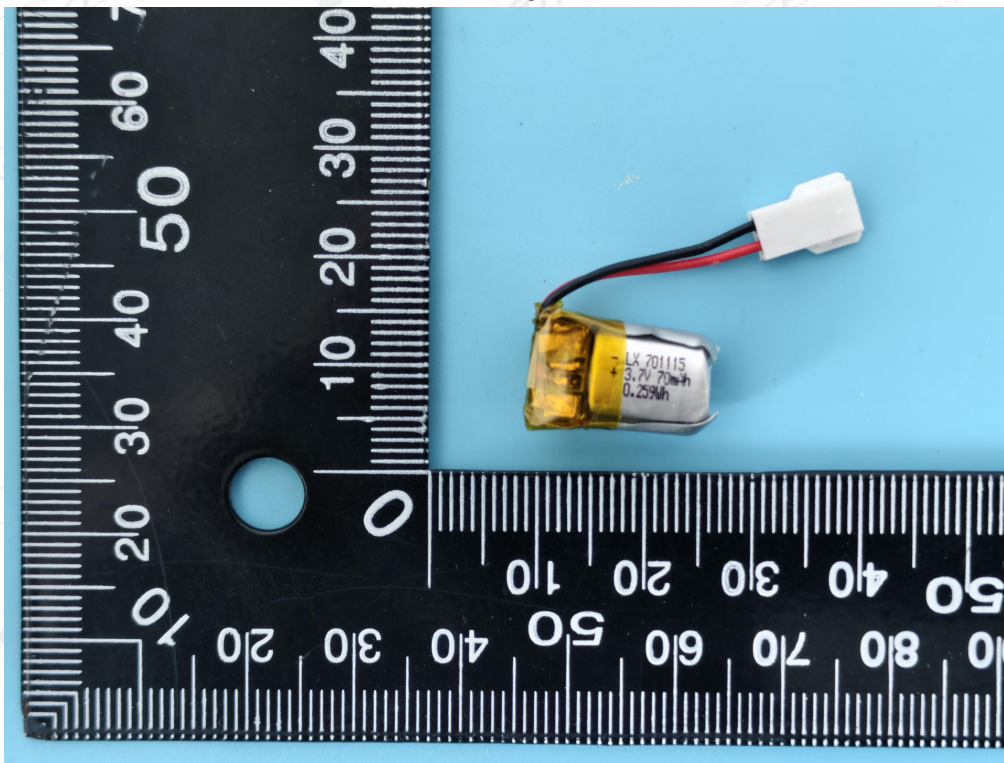


Front view of battery

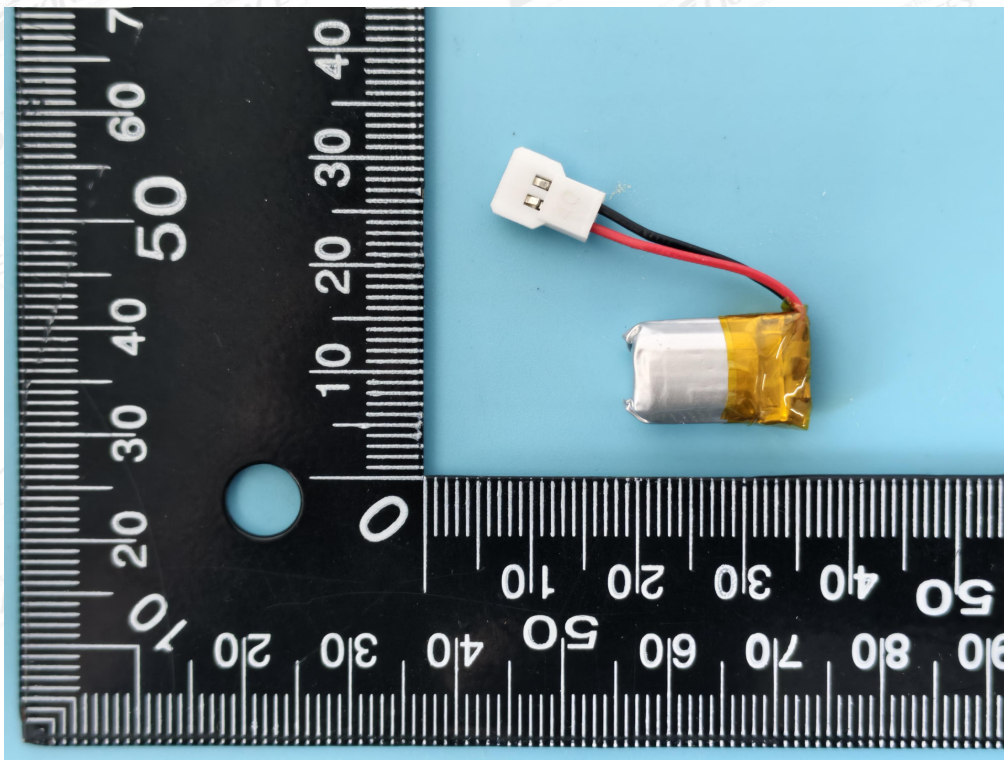


Back view of battery

The result shown in this test report refer only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

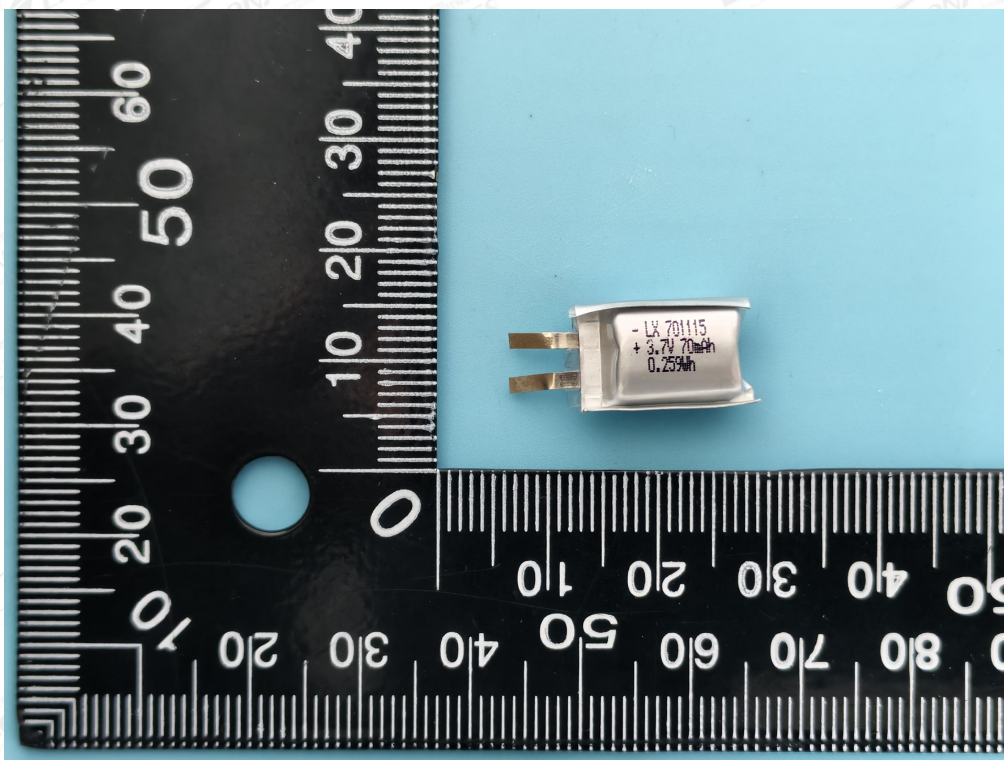


Front view of cell

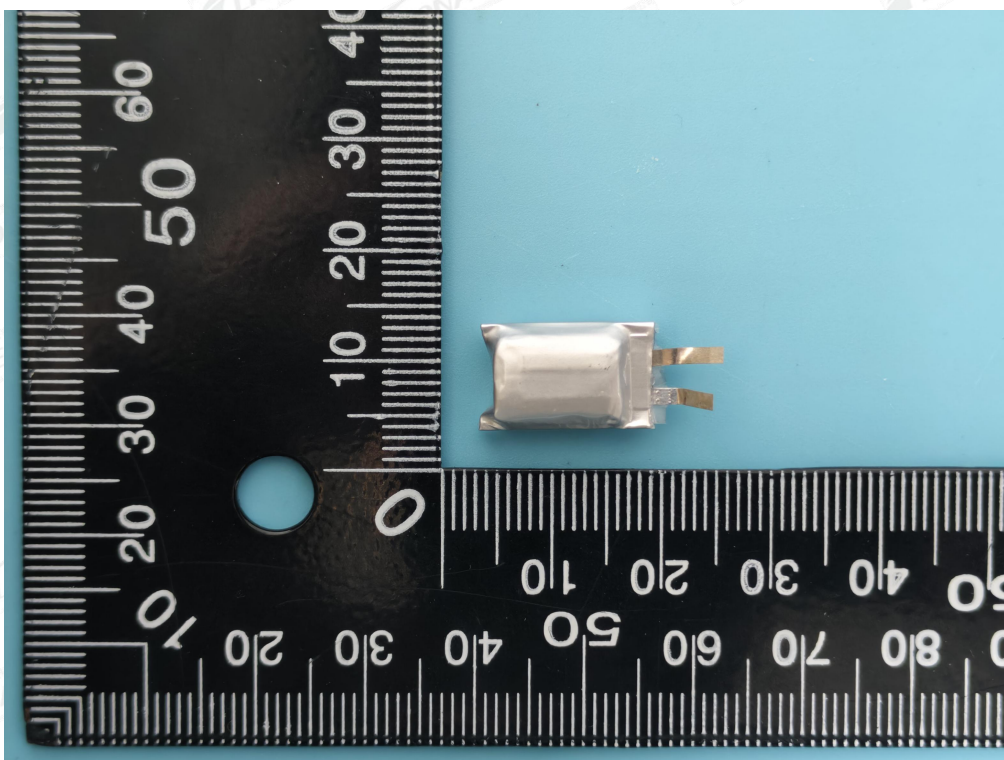


Back view of cell

The result shown in this test report refers only to the sample(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

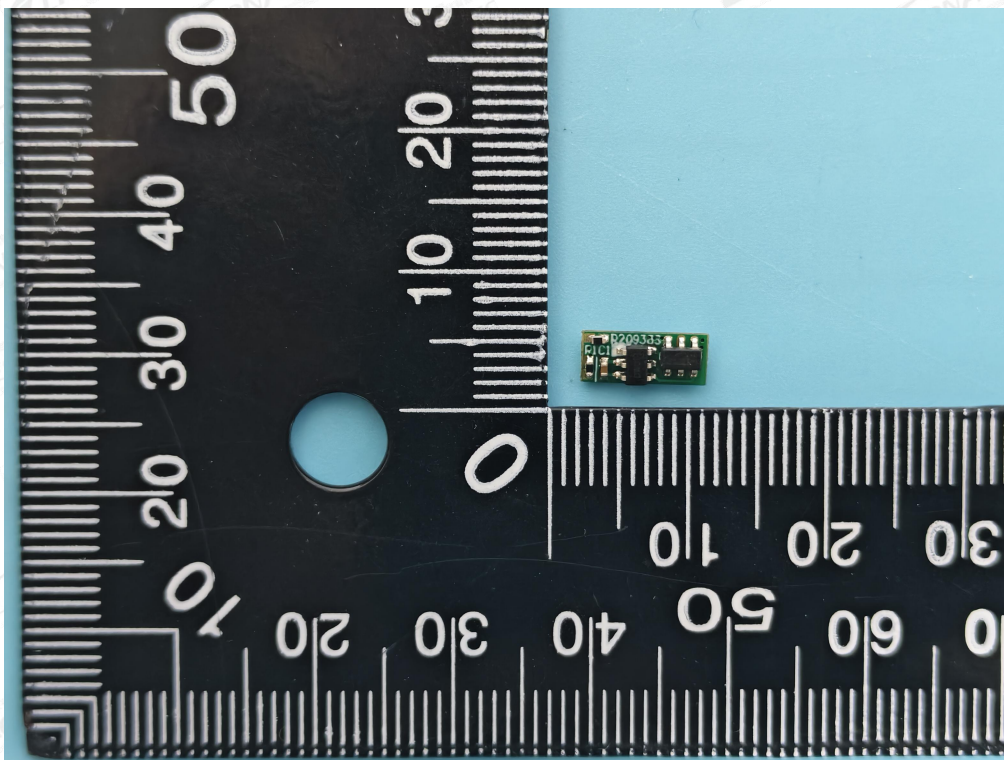

Front view of PCB

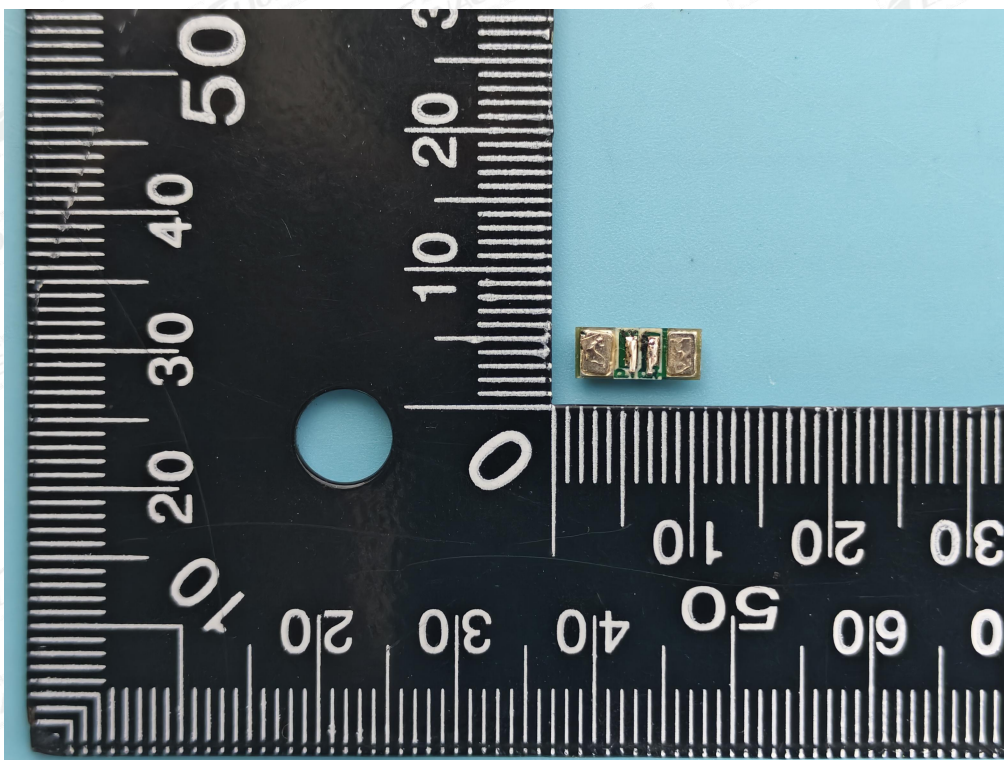

Back view of PCB

The result shown in this test report refers only to the sample(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces, it cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

### Test Equipment

| No | Name                                          | Model specifications   | Device Number                                                      | Calibration validity | Using (√) |
|----|-----------------------------------------------|------------------------|--------------------------------------------------------------------|----------------------|-----------|
| 1  | Battery forced internal testing machine       | FH-07                  | LA-BT-E006                                                         | 2025-12-02           | √         |
| 2  | Drop test system                              | FH-03                  | LA-BT-E010                                                         | 2025-12-02           | √         |
| 3  | Electromagnetic vibration testing machine     | EV203VT640             | LA-BT-E013                                                         | 2025-12-02           | √         |
| 4  | Electronic balance                            | UTP-313                | LA-BT-E069                                                         | 2025-12-02           | √         |
| 5  | Battery crush test instrument                 | GX-5067-CSM            | LA-BT-E084                                                         | 2025-12-02           | √         |
| 6  | Battery thermal shock test box                | GX-3020-B              | LA-BT-E085                                                         | 2025-12-02           | √         |
| 7  | Mechanical impact tester                      | HSKT10                 | LA-BT-E086                                                         | 2025-12-02           | √         |
| 8  | Gauge                                         | H:57.1*h:25.4*R:31.7mm | LA-BT-E077                                                         | 2025-12-04           | √         |
| 9  | DC power supply                               | UTP1306S               | LA-BT-E079<br>LA-BT-E080<br>LA-BT-E081<br>LA-BT-E082<br>LA-BT-E083 | 2025-12-02           | √         |
| 10 | Digital temperature recorder                  | GL240                  | LA-BT-E096                                                         | 2026-03-12           | √         |
| 11 | Battery short circuit tester                  | GX-055-B50             | LA-BT-E097                                                         | 2026-03-12           | √         |
| 12 | Temperature hygrometer                        | HTC-1                  | LA-BT-E064                                                         | 2025-12-04           | √         |
| 13 | Multimeter                                    | 117C                   | LA-BT-E024                                                         | 2025-12-02           | √         |
| 14 | High-performance battery detection system     | CT-4008-5V6A-S1        | LA-BT-E070                                                         | 2025-12-02           | √         |
| 15 | Programmable fast temperature change test box | GX-3000-150LT          | LA-BT-E072                                                         | 2025-12-02           | √         |

### ----END OF REPORT----

The result shown in this test report refers only to the samples(s) tested by unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by Lionaces Technology Co., Ltd. and cannot be reproduced except in full with our prior written permission. The document is available on request and the brief information for its validation can be assessed and confirmed on the website, <http://www.lionaces.com>

Add: 301, Building B6, Junfeng Industrial Zone, Yonghe Road, Heping Community, Fuhai Street, Baoan District, Shenzhen, Guangdong, China.

Website: [www.lionaces.com](http://www.lionaces.com)

E-mail: [service@lionaces.com](mailto:service@lionaces.com)

Tel: (86-755)-28280690